

1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — BRASS LID FLOOR BOXES

Brass Square Edge Recessed Floor Box, 8 x Auto-Switched GPO + 8 x Data

FOBBRR8P8D-SE

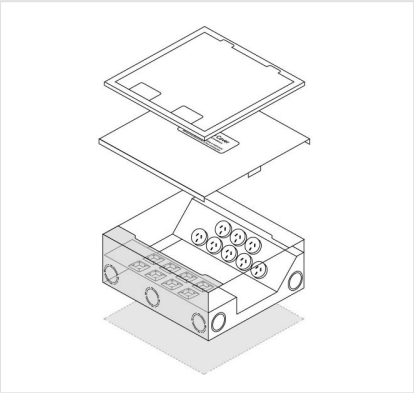







The FOBBRR8P8D-SE recessed lid floor box features a 14mm Brass hinged recessed lid, a Steel box body, and 8 x 10Amp Round Auto Switched GPOs plus 8 x Single Data Outlet Clips for high-capacity power and data connectivity. Previously known as FFOB-250B.

TECHNICAL SPECIFICATIONS

Part Number	**FOBBRR8P8D-SE**
Series	**FOBBRR8P8D-SE Recessed Lid Floor Box**
Lid Material	**Brass Hinged Lid, 14mm Recessed (245 x 245mm)**
Body Material	**Steel**
Outlet Configuration	**8 x 10Amp Round Auto Switched GPOs + 8 x Single Data Outlet Clips**
Conduit Entry	**13 x Combination 25/32mm Knockouts (10 side, 3 base)**
Weight	**5.0 kg (approx.)**

DIMENSIONS

Block-out in slab: 248×247×120 mm · dimensions nominal

LID SIZE	BOX BODY
245×245 mm	**228×227×110** mm
SLAB BLOCK-OUT	RAISED FLOOR CUT-OUT
248×247×120 mm	**230×229** mm

KEY FEATURES

- Brass hinged lid (245 x 245mm, 14mm recessed rebate) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 228 x 227 x 110mm nominal depth
- 13 x combination 25/32mm conduit knockouts (10 side, 3 base)
- 8 x 10Amp Round Auto Switched GPOs (supplied)
- 8 x Single Data Outlet Clips (supplied)

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBBRR8P8D-SE**
Series	**FOBBRR8P8D-SE Recessed Lid Floor Box (Brass, 8 x GPO + 8 x Data)**
Block-out in Concrete Slab	**248 x 247 x 120mm nominal**
Warranty	**Manufacturer's warranty**