
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Round Flush Floor Box, 2 x 10A Auto-Switched GPO

FOBCSSF2PS67



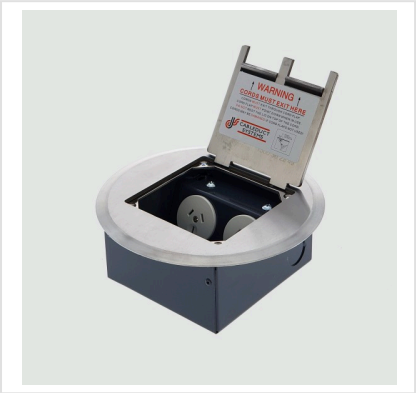





The FOBCSSF2PS67 flush lid floor box features a hinged round Stainless Steel lid, a Steel box body, and 2 x 10Amp round auto-switched GPOs for reliable power. Previously known as FFOB-143R.

TECHNICAL SPECIFICATIONS

Part Number	**FOBCSSF2PS67**
Series	**FOBCSSF2PS67 Flush Lid Floor Box**
Lid Material	**Stainless Steel, Round, Hinged**
Body Material	**Steel**
Outlet Configuration	**2 x 10Amp Round Auto Switched GPOs**
Conduit Entry	**5 x 25mm Conduit Knockouts (4 side, 1 base)**
Weight	**1.6 kg (approx.)**

DIMENSIONS

Block-out in slab: 146×155×77 mm · dimensions nominal

LID SIZE	BOX BODY
145×145 mm	**126×135×67** mm
SLAB BLOCK-OUT	RAISED FLOOR CUT-OUT
146×155×77 mm	**128×137** mm

KEY FEATURES

- Hinged round Stainless Steel lid (145 x 145mm) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 126 x 135 x 67mm nominal depth
- 5 x 25mm conduit knockouts (4 side, 1 base)
- Floating floor brackets available upon request

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBCSSF2PS67**
Series	**FOBCSSF2PS67 Flush Lid Floor Box (Stainless Steel, Round, 2 x 10Amp Round Auto Switched GPOs)**
Block-out in Concrete Slab	**146 x 155 x 77mm nominal**
Warranty	**Manufacturer's warranty**