

1300 302 249
sales@cableduct.com.au
www.cableduct.com.au


FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Tile Flush Floor Box, 2 x 10A Auto-Switched GPO + 3 x Data

FOBSS19F2P3D

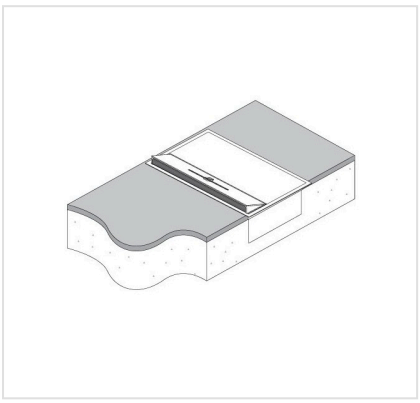





The FFOB-285S/70 flush lid floor box features a hinged 19mm Stainless Steel lid, a Steel box body, and 2 x 10Amp Round GPOs plus 3 x Single Data Outlet Clips for power and data connectivity.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSS19F2P3D**
Series	**FFOB-285S/70 Flush Lid Floor Box**
Lid Material	**Stainless Steel, Hinged, 19mm Flush**
Body Material	**Steel**
Outlet Configuration	**2 x 10Amp Round GPOs + 3 x Single Data Outlet Clips**
Conduit Entry	**12 x Combination 25/32mm Knockouts (8 side, 4 base)**
Weight	**5.0 kg (approx.)**

DIMENSIONS

Block-out in slab: 170×285×92 mm · dimensions nominal

LID SIZE	BOX BODY
175×285 mm	**157×260×67** mm
SLAB BLOCK-OUT	RAISED FLOOR CUT-OUT
170×285×92 mm	**165×275** mm

KEY FEATURES

- Hinged, 19mm Stainless Steel lid (175 x 285mm) screw-fixes to the steel box body
- 1 x cord exit flap allows cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 157 x 260 x 67mm nominal depth
- 12 x combination 25/32mm conduit knockouts (8 side, 4 base)
- 2 x 10Amp Round GPOs (supplied)
- 3 x Single Data Outlet Clips (supplied)
- Floating Floor brackets are available upon request

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBSS19F2P3D**
Series	**FFOB-285S/70 Flush Lid Floor Box, Stainless Steel 19mm, 2 x GPO + 3 x Data**
Block-out in Concrete Slab	**170 x 285 x 92mm nominal**
Warranty	**Manufacturer's warranty**