

1300 302 249
sales@cableduct.com.au
www.cableduct.com.au


FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Tile Flush Floor Box, 6 x Double GPO

FOBSS19F6STDO

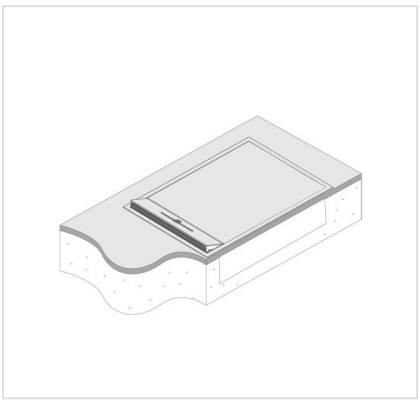





The FOBSS19F6STDO flush lid floor box features a 304 Grade Stainless Steel lid and frame with a flush finish, a Colorbond® Steel box body, and capacity for 6 x Standard Outlets (power or data, not supplied). Previously known as FFOB-430S-SS.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSS19F6STDO**
Series	**FOBSS19F6STDO Flush Lid Floor Box**
Lid & Frame Material	**304 Grade Stainless Steel**
Body Material	**Colorbond® Steel**
Outlet Configuration	**6 x Standard Outlets (Power or Data)**
Conduit Entry	**14 x 25/32mm Conduit Knockouts**
Earth Lead	**1 x M4 Earth Lead Included**
Outlet Fixings	**12 x Included**
Weight	**1.6 kg (approx.)**

DIMENSIONS

All dimensions nominal

LID & FRAME	BOX BODY
388×264 mm	**380×250×105** mm
PRE-FORMED RECESS	
400×270×115 mm	

KEY FEATURES

- 304 Grade Stainless Steel lid & frame, 388 x 264 x 25mm, flush finish
- Cord exit flap with foam dust guard and recessed handle, 4 x M3 lid-to-body fixings
- Galvanised steel temporary cover, 378 x 252 x 10mm, tape in place prior to concrete pour
- Colorbond® Steel box body, 380 x 250 x 105mm, with 4 x M5 lid levelling adjustment screws
- Capacity for 6 x Standard Outlets (power or data, not supplied)
- 14 x 25/32mm conduit knockouts, with entry points front, back and underside
- Includes 1 x M4 earth lead and 12 x outlet fixings to attach standard outlets to brackets
- Power/Data divider available separately

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels

ORDERING INFORMATION

Part Number	**FOBSS19F6STDO**
Series	**FOBSS19F6STDO Flush Lid Floor Boxes (Stainless Steel, 6 x Standard Outlets)**
Pre-formed Recess Required	**400 x 270 x 115mm**
Warranty	**Manufacturer's warranty**