

1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Tile Flush Floor Box, 8 x Auto-Switched GPO + 8 x Data

FOBSS19F8P8DS80

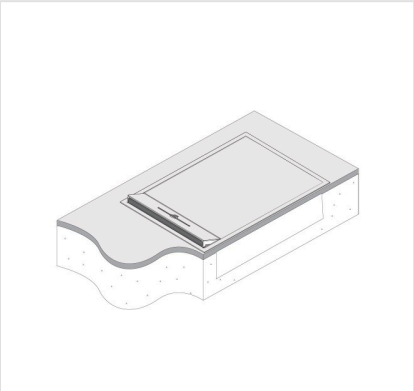





The FOBSS19F8P8DS80 flush lid floor box features a 304 Grade Stainless Steel lid and frame with a 19mm flooring rebate, a Colorbond® Steel box body, and capacity for 8 x Auto Switched Outlets plus 8 x Data provisions. Previously known as FFOB-430S/80-SS.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSS19F8P8DS80**
Series	**FOBSS19F8P8DS80 Flush Lid Floor Box**
Lid & Frame Material	**304 Grade Stainless Steel**
Body Material	**Colorbond® Steel**
Outlet Configuration	**8 x Auto Switched Outlets + 8 x Data**
Conduit Entry	**14 x 25/32mm Conduit Knockouts**
Earth Lead	**1 x M4 Earth Lead Included**
Outlet Fixings	**12 x Included**
Weight	**1.6 kg (approx.)**

DIMENSIONS

All dimensions nominal

LID & FRAME	FLOORING REBATE
388×264 mm	**19** mm
BOX BODY	PRE-FORMED RECESS
380×250×105 mm	**400×270×115** mm

KEY FEATURES

- 304 Grade Stainless Steel lid & frame, 388 x 264 x 25mm, with 19mm flooring rebate
- Cord exit flap with foam dust guard and recessed handle, 4 x M3 lid-to-body fixings
- Galvanised steel temporary cover, 378 x 252 x 10mm, tape in place prior to concrete pour
- Colorbond® Steel box body, 380 x 250 x 105mm, with 4 x M5 lid levelling adjustment screws
- Capacity for 8 x Auto Switched Outlets plus 8 x Data provisions
- 14 x 25/32mm conduit knockouts, with entry points front, back and underside
- Includes 1 x M4 earth lead and 12 x outlet fixings to attach standard outlets to brackets
- Power/Data divider available separately

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels

ORDERING INFORMATION

Part Number	**FOBSS19F8P8DS80**
Description	**Stainless Steel Tile Flush Floor Box, 8 x Auto-Switched GPO + 8 x Data**
Warranty	**Manufacturer's warranty**