
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Tile Recessed Floor Box, 2 x 10A Auto-Switched GPO

FOBSS19R2PS67



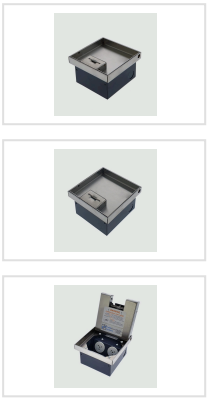

The FOBSS19R2PS67 recessed lid floor box features a 19mm Stainless Steel recessed lid, a Steel box body, and 2 x 10Amp Round Auto Switched GPOs for power connectivity. Previously known as FFOB-149/2A.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSS19R2PS67**
Series	**FOBSS19R2PS67 Recessed Lid Floor Box**
Lid Material	**Stainless Steel, 19mm Recessed**
Body Material	**Steel**
Outlet Configuration	**2 x 10Amp Round Auto Switched GPOs**
Conduit Entry	**5 x 25mm Knockouts (4 side, 1 base)**
Weight	**1.8 kg (approx.)**

DIMENSIONS

Block-out in slab: 146×155×101 mm · dimensions nominal

BOX BODY
126×135×67 mm

SLAB BLOCK-OUT
146×155×101 mm

RAISED FLOOR CUT-OUT
128×137 mm

KEY FEATURES

- Stainless Steel recessed lid (19mm rebate) sits flush with the floor finish
- Cord exit flap with dust guards and recessed handle allows cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 126 x 135 x 67mm nominal depth
- 5 x 25mm conduit knockouts (4 on the side of the box, 1 on the base)
- 2 x 10Amp Round Auto Switched GPOs (supplied)

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBSS19R2PS67**
Series	**FOBSS19R2PS67 Recessed Lid Floor Box, Stainless Steel, 2 x Auto Switched GPO**
Block-out in Concrete Slab	**146 x 155 x 101mm nominal**
Warranty	**Manufacturer's warranty**