


FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Tile Recessed Floor Box, 8 x Auto-Switched GPO + 8 x Data

FOBSS19R8P8DS80

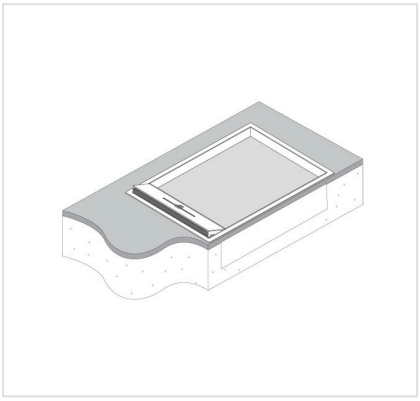





The FOBSS19R8P8DS80 recessed lid floor box features a 19mm 304 Grade Stainless Steel recessed lid, a Colorbond® Steel box body, and capacity for 8 x Auto Switched Outlets plus provisions for 8 x Data (not supplied). Previously known as FFOB-430/80-SS.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSS19R8P8DS80**
Series	**FOBSS19R8P8DS80 Recessed Lid Floor Box**
Lid Material	**304 Grade Stainless Steel, 19mm Recessed**
Body Material	**Colorbond® Steel**
Outlet Configuration	**8 x Auto Switched Outlets (Power) + Provisions for 8 x Data (not supplied)**
Conduit Entry	**14 x 25/32mm Knockouts**
Weight	**1.6 kg (approx.)**

DIMENSIONS

Block-out in slab: 400×270×115 mm · dimensions nominal

LID SIZE	BOX BODY
388×264×25 mm	**380×250×105** mm
SLAB BLOCK-OUT	
400×270×115 mm	

KEY FEATURES

- 304 Grade Stainless Steel lid and frame (388 x 264 x 25mm) with 19mm flooring rebate sits flush with the floor finish
- Cord exit flap with foam dust guard and recessed handle; 4 x M3 lid-to-body fixings
- Galvanised Steel temporary cover (378 x 252 x 10mm) tapes in place during the concrete pour to prevent ingress of slurry
- Colorbond® Steel box body, 380 x 250 x 105mm nominal, with 4 x M5 lid levelling adjustment screws
- 14 x 25/32mm conduit knockouts
- Capacity for 8 x Auto Switched Outlets (power) plus provisions for 8 x Data outlets (not supplied); power/data divider available separately
- Includes M4 earth lead and outlet fixing hardware

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels

ORDERING INFORMATION

Part Number	**FOBSS19R8P8DS80**
Series	**FOBSS19R8P8DS80 Recessed Lid Floor Box, Stainless Steel, 8 x Auto Switched Outlets + 8 x Data**
Block-out in Concrete Slab	**400 x 270 x 115mm nominal**
Warranty	**Manufacturer's warranty**