
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Square Edge Flush Floor Box, 2 x 10A Auto-Switched GPO

FOBSSF2PS67-SE



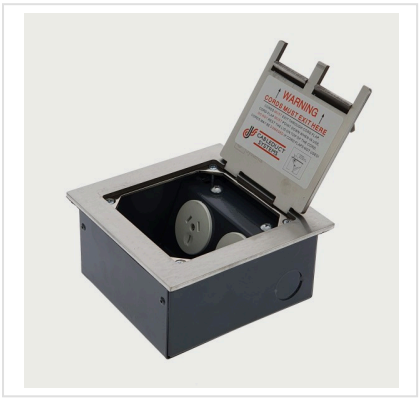

The FOBSSF2PS67-SE flush lid floor box features a Stainless Steel hinged lid, a Steel box body, and 2 x 10Amp Round Auto Switched GPO outlets. Previously known as FFOB-143F.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSSF2PS67-SE**
Series	**FOBSSF2PS67-SE Flush Lid Floor Box**
Lid Material	**Stainless Steel Hinged Lid (145 x 145mm)**
Body Material	**Steel**
Outlet Configuration	**2 x 10Amp Round Auto Switched GPOs**
Conduit Entry	**5 x 25mm Knockouts (4 side, 1 base)**
Weight	**1.6 kg (approx.)**

DIMENSIONS

Block-out in slab: 146×155×77 mm · dimensions nominal

BOX BODY	SLAB BLOCK-OUT
126×135×67 mm	**146×155×77** mm
RAISED FLOOR CUT-OUT	
128×137 mm	

KEY FEATURES

- Stainless steel hinged lid (145 x 145mm) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 126 x 135 x 67mm nominal depth
- 5 x 25mm conduit knockouts (4 on the side of the box, 1 on the base)
- 2 x 10Amp round auto switched GPOs
- Floating floor brackets available upon request

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBSSF2PS67-SE**
Series	**FOBSSF2PS67-SE Flush Lid Floor Box, Stainless Steel, 2 x 10Amp Auto Switched GPOs**
Block-out in Concrete Slab	**146 x 155 x 77mm nominal**
Warranty	**Manufacturer's warranty**