
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES


Stainless Steel Flush Floor Box, 4 x Double GPO

FOBSSF4STDO



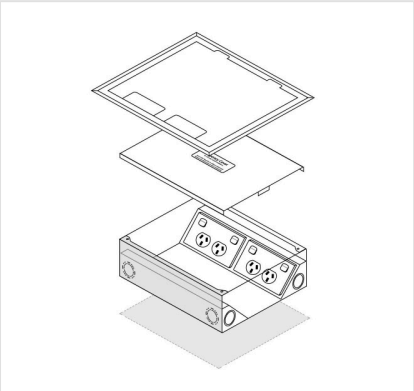





The FOBSSF4STDO flush lid floor box features a hinged Stainless Steel lid, a Steel box body, and an outlet bracket configuration provisioned with 4 x Standard Outlets. Previously known as FFOB-340S/4P12D.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSSF4STDO**
Series	**FOBSSF4STDO Flush Lid Floor Box**
Lid Material	**Stainless Steel, Hinged**
Body Material	**Steel**
Outlet Configuration	**Outlet Bracket to suit 4 x Clipsal 2000 Series Power/Data/AV Outlets (4 x Standard Outlets)**
Conduit Entry	**12 x 25mm Knockouts (2 each side, 4 on base)**

DIMENSIONS

Block-out in slab: 340×240×118 mm · dimensions nominal

LID SIZE **241×340** mm	BOX BODY **320×220×108** mm
SLAB BLOCK-OUT **340×240×118** mm	RAISED FLOOR CUT-OUT **322×222** mm

KEY FEATURES

- Hinged, Stainless Steel lid (241 x 340mm) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 320 x 220 x 108mm nominal depth
- 12 x 25mm conduit knockouts (2 on each side of the box, 4 on the base)
- Outlet bracket to suit 4 x Clipsal 2000 Series style Power/Data/AV outlets
- 4 x Standard Outlets (supplied)

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBSSF4STDO**
Series	**FOBSSF4STDO Flush Lid Floor Box, Stainless Steel, 4 x Standard Outlets**
Block-out in Concrete Slab	**340 x 240 x 118mm nominal**
Warranty	**Manufacturer's warranty**