
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES


Stainless Steel Flush Floor Box, 4 x Double GPO + 12 x Data

FOBSSF6STDO



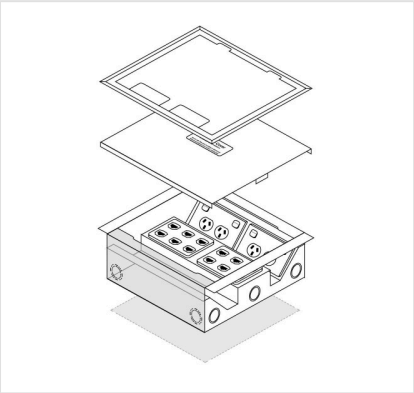





The FOBSSF6STDO flush lid floor box features a hinged Stainless Steel lid, a Steel box body, and an outlet bracket configuration for 4 x Double GPO Outlets plus 12 x Single Data Outlets. Previously known as FFOB-340S.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSSF6STDO**
Series	**FOBSSF6STDO Flush Lid Floor Box**
Lid Material	**Stainless Steel, Hinged**
Body Material	**Steel**
Outlet Configuration	**Outlet Bracket to suit 6 x Clipsal 2000 Series Power/Data/AV Outlets (4 x Double GPO + 12 x Single Data)**
Conduit Entry	**10 x Combination 25/32mm Knockouts**

DIMENSIONS

Block-out in slab: 342×285×114 mm · dimensions nominal

LID SIZE	BOX BODY
241×340 mm	**322×265×110** mm
SLAB BLOCK-OUT	RAISED FLOOR CUT-OUT
342×285×114 mm	**324×267** mm

KEY FEATURES

- Hinged, Stainless Steel lid (241 x 340mm) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 322 x 265 x 110mm nominal depth
- 10 x combination 25/32mm conduit knockouts
- Outlet bracket to suit 6 x Clipsal 2000 Series style Power/Data/AV outlets
- 4 x Double GPO Outlets (supplied)
- 12 x Single Data Outlets (supplied)

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	**FOBSSF6STDO**
Series	**FOBSSF6STDO Flush Lid Floor Box, Stainless Steel, 4 x Double GPO + 12 x Data**
Block-out in Concrete Slab	**342 x 285 x 114mm nominal**
Warranty	**Manufacturer's warranty**