



ENDURA SERIES FLOOR BOXES — EB6 64MM DEEP

EnduraBox 64 Floor Box — SS Flush Lid, 4 × Auto-Switched Power, 6 × Data/Mech Provisions

EB6SFB4P6D

RCM

SAA

AS/NZS 3100 · 3112 · 3133 · IEC 60670.23



The EB6SFB4P6D provides 4 auto-switched 10A power outlets and 6 data/mechanical provisions (with bezel) in a slim 64mm deep enclosure under a stainless steel flush lid. The 6 data/mech positions accommodate a wide range of standard switch plates for exceptional flexibility.

TECHNICAL SPECIFICATIONS

Part Number	EB6SFB4P6D
Series	EnduraBox 64 — EB6
Lid Type	Stainless Steel Flush Lid
Box Dimensions	257 × 251 × 64mm Deep
Nominal Recess	267 × 261 × 74mm Deep
Power Outlets	4 × 10A Auto-Switching
Data / Comms	6 × Data/Mechanical Provisions (with bezel)
Conduit Knockouts	18 × Ø25mm
Box Material	Heavy Duty Steel Body

DIMENSIONS

Body: W 257 × L 251 × D 64 mm	
BOX WIDTH 257 mm	BOX LENGTH 251 mm
BOX DEPTH 64 mm	NOMINAL RECESS 267×261 mm

KEY FEATURES

- Stainless steel flush lid for clean low-profile appearance
- 4 × 10A auto-switched power outlets
- 6 × data/mechanical provisions — flexible plate accommodation
- Includes bezel for a neat finished appearance
- Slim 64mm depth for limited recess applications
- Heavy duty steel box body
- 18 × Ø25mm conduit knockouts
- Suitable for concrete and timber floor installation

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Healthcare & medical facilities
Airport & transport terminals	Convention & exhibition centres

ORDERING INFORMATION

Part Number	EB6SFB4P6D
Series	EnduraBox 64 — EB6
Warranty	Manufacturer's warranty



ENDURA SERIES FLOOR BOXES — EB6 64MM DEEP — SPECIFICATIONS & DIMENSIONS

EnduraBox 64 Floor Box — SS Flush Lid, 4 × Auto-Switched Power, 6 × Data/Mech Provisions

EB6SFB4P6D


RCM

SAA

AS/NZS 3100 · 3112 · 3133 · IEC 60670.23

FULL TECHNICAL SPECIFICATIONS

Part Number	EB6SFB4P6D
Series	EnduraBox 64 — EB6
Lid Type	Stainless Steel Flush Lid
Box Dimensions	257 × 251 × 64mm Deep
Nominal Recess	267 × 261 × 74mm Deep
Power Outlets	4 × 10A Auto-Switching
Data / Comms	6 × Data/Mechanical Provisions (with bezel)
Conduit Knockouts	18 × Ø25mm
Box Material	Heavy Duty Steel Body

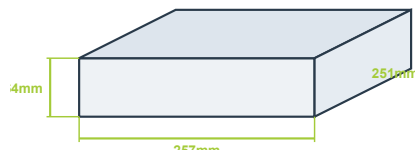

Box dimensions (not to scale)

ORDERING INFORMATION

Part Number	EB6SFB4P6D
Series	EnduraBox 64 — EB6
Warranty	Manufacturer's warranty

Compliance & Standards: Complies with AS/NZS 3100, 3112 & 3133, and IEC 60670.23. RCM & SAA approved. Auto-switching power outlets comply with AS/NZS 3112. Stainless steel lids are 304 grade. Must be installed by a licensed electrician in accordance with AS/NZS 3000 (Wiring Rules). Cableaway reserves the right to alter specifications without notice.

Accessories: A full range of Endura Series accessories is available — visit cableaway.com.au or call 1300 883 452.