




FLOOR OUTLET BOXES & FLOOR BOXES

2 Power 4 Data Shallow Stainless Steel 19mm Recessed lid Floor Outlet Box

FBSS19R2P4DS50

RCM SAA AS/NZS 3100 · 3112 · 3133 · IEC 60670.23

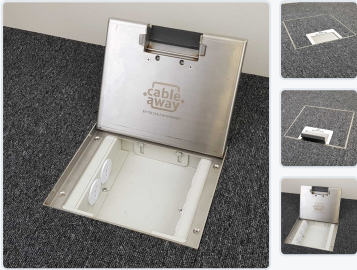

The FBSS19R2P4DS50 floor outlet box features a stainless steel recessed 19mm lid, providing 2 power and 4 data provisions for comprehensive connectivity. The shallow 54 mm depth suits installations where floor depth is limited. Built for reliable in-floor service delivery in commercial and residential projects.

TECHNICAL SPECIFICATIONS

Part Number	FBSS19R2P4DS50
Lid Type	Recessed — 19 mm
Lid Finish	Stainless Steel
Carcass Type	Shallow Depth (54 mm)
Outlet Configuration	2 × Power + 4 × Data provisions
Body Material	Powder Coated Zinc Anneal Steel
Lid Material	Stainless Steel
Conduit Knockouts	25 mm (4 sides)
Weight	2.2 kg (approx.)

DIMENSIONS

Body: See dimensions × D 54 mm			
LID WIDTH	see web mm	LID LENGTH	see web mm
BODY WIDTH	see web mm	BODY DEPTH	54 mm

KEY FEATURES

- Stainless Steel recessed — 19 mm lid — precise alignment with any floor surface
- Powder coated zinc anneal steel body for durability and corrosion resistance
- 25 mm (4 sides) conduit knockouts for flexible cable routing
- 2 power + 4 data provisions — single-box AV and power solution
- Shallow 54 mm body depth — ideal for limited-depth floor installations
- Height-adjustable lid mechanism for perfect flush with floor finish
- Suitable for concrete, timber, and raised floor installations

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels
Educational facilities	Residential installations

ORDERING INFORMATION

Part Number	FBSS19R2P4DS50
Series	Standard Series Floor Outlet Boxes
Compliance	AS/NZS 3100, 3112, 3133, IEC 60670.23 — RCM & SAA approved
Installation	By a licensed electrician per AS/NZS 3000 (Wiring Rules)
Warranty	Manufacturer's warranty