




ELECTRICAL LOCKOUT RANGE

Double Head Lock

LODHL

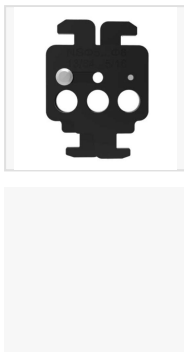

Protect your team, your site and your reputation with Cableaway's Double Head Lock. Designed for total electrical safety, this multi-lock device accepts up to 3 padlocks at once, letting multiple trades isolate the same breaker independently so work can proceed safely across teams. Made from powder-coated steel, it's built to withstand demanding site conditions while helping keep lockout/tagout (LOTO) procedures compliant with Australian safety standards. Once fitted, it locks off with a compatible safety padlock — giving total peace of mind that the circuit can't be switched back on until work is complete.

TECHNICAL SPECIFICATIONS

Part Number	LODHL
Product Range	Electrical Lockout Range
Device Type	Circuit Breaker Lockout
Suits	Multi-Trade Isolation
Construction	Powder-Coated Steel
Keyhole Dimension	8.6mm
Material	Powder-coated steel

SUITABILITY

Steel keyhole lockout accepting up to 3 padlocks	
KEYHOLE DIMENSION 8.6mm	MAX. PADLOCKS 3

KEY FEATURES

- Secures breakers against re-energisation
- Fits in seconds with basic hand tools
- Locks off with a compatible safety padlock
- Supports compliant LOTO / WHS procedures
- Up to 3 padlocks — independent multi-trade lockout
- Robust powder-coated steel body
- Part of a full electrical lockout device range

TYPICAL APPLICATIONS

Electrical switchboards	Maintenance & shutdown work
Construction sites	Industrial plant & facilities
Commercial building services	Utility & contractor works




ELECTRICAL LOCKOUT RANGE — SPECIFICATIONS & DIMENSIONS

Double Head Lock

LODHL

FULL TECHNICAL SPECIFICATIONS

Part Number	LODHL
Product Range	Electrical Lockout Range
Device Type	Circuit Breaker Lockout
Suits	Multi-Trade Isolation
Construction	Powder-Coated Steel
Keyhole Dimension	8.6mm
Material	Powder-coated steel

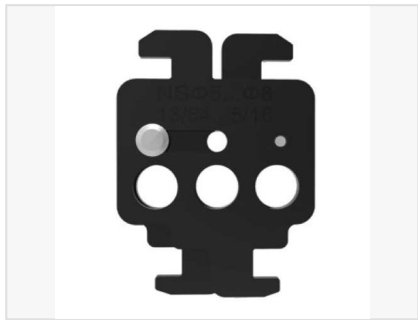

Lockout fitted ready for padlock (not to scale)

ORDERING INFORMATION

Part Number	LODHL
Range	Electrical Lockout Range
Related	LOPADLOCKKA — Keyed-Alike Safety Padlock

INSTALLATION & USE

Fit the double head lock to the breaker or isolation point per its keyhole fitting. Each trade working on the equipment fits their own padlock through one of the three positions — the breaker cannot be re-energised until every padlock has been removed by the person who applied it, ensuring safe multi-trade isolation.

Compliance & Notes: Cableaway lockout devices are designed to support compliant lockout/tagout (LOTO) procedures under Australian WHS requirements, but the suitability of any lockout for a specific circuit breaker make and model should always be confirmed before use. Always follow your site's isolation procedures and use an appropriately rated safety padlock. Cableaway reserves the right to alter specifications without notice.