




ELECTRICAL LOCKOUT RANGE

Small-Scale Circuit Breaker Lockout for Schneider Breakers

LOMCBSCH



Protect your team, your site and your reputation with Cableaway's Small-Scale Circuit Breaker Lockout for Schneider Breakers. Designed for total electrical safety, this lockout is purpose-fit for Schneider circuit breakers, keeping them securely isolated during maintenance and preventing unexpected re-energisation. Made from nylon and ABS, it's built to withstand demanding site conditions while helping keep lockout/tagout (LOTO) procedures compliant with Australian safety standards. Once fitted, it locks off with a compatible safety padlock — giving total peace of mind that the circuit can't be switched back on until work is complete.

TECHNICAL SPECIFICATIONS

Part Number	LOMCBSCH
Product Range	Electrical Lockout Range
Device Type	Circuit Breaker Lockout
Suits	Schneider Breakers
Material	Nylon & ABS
Padlock Compatibility	6mm Shackle Safety Padlock
Material	Nylon

SUITABILITY

Fits Schneider brand circuit breakers	
BREAKER BRAND Schneider	PADLOCK SHACKLE 6mm

KEY FEATURES

- Secures breakers against re-energisation
- Fits in seconds with basic hand tools
- Locks off with a compatible safety padlock
- Supports compliant LOTO / WHS procedures
- Purpose-fit for Schneider breaker profiles
- Compact small-scale format
- Part of a full electrical lockout device range

TYPICAL APPLICATIONS

Electrical switchboards	Maintenance & shutdown work
Construction sites	Industrial plant & facilities
Commercial building services	Utility & contractor works




ELECTRICAL LOCKOUT RANGE — SPECIFICATIONS & DIMENSIONS

Small-Scale Circuit Breaker Lockout for Schneider Breakers

LOMCBSCH

FULL TECHNICAL SPECIFICATIONS

Part Number	LOMCBSCH
Product Range	Electrical Lockout Range
Device Type	Circuit Breaker Lockout
Suits	Schneider Breakers
Material	Nylon & ABS
Padlock Compatibility	6mm Shackle Safety Padlock
Material	Nylon

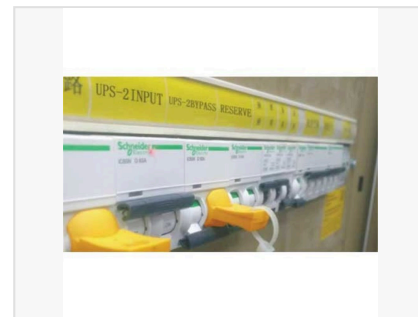

Lockout fitted ready for padlock (not to scale)

ORDERING INFORMATION

Part Number	LOMCBSCH
Range	Electrical Lockout Range
Related	LOPADLOCK — Nylon Safety Padlock

INSTALLATION & USE

Fit the lockout to the circuit breaker with the breaker in the OFF position, following the device's fitting method (screwdriver, aluminium clamp or push-button, as applicable). Once fitted, pass the shackle of a compatible safety padlock through the lockout body and lock closed so the breaker cannot be switched back to ON. Attach a lockout tag noting who applied the lockout and why, per your site's isolation procedure. Only the person who applied the lock should remove it, once work is safely complete.

Compliance & Notes: Cableaway lockout devices are designed to support compliant lockout/tagout (LOTO) procedures under Australian WHS requirements, but the suitability of any lockout for a specific circuit breaker make and model should always be confirmed before use. Always follow your site's isolation procedures and use an appropriately rated safety padlock. Cableaway reserves the right to alter specifications without notice.