




TRENCH & FLOOR DUCT — FD150 FLUSH FLOOR DUCT

FD150 — Flush Floor Duct with Galvanised Lid

FD150

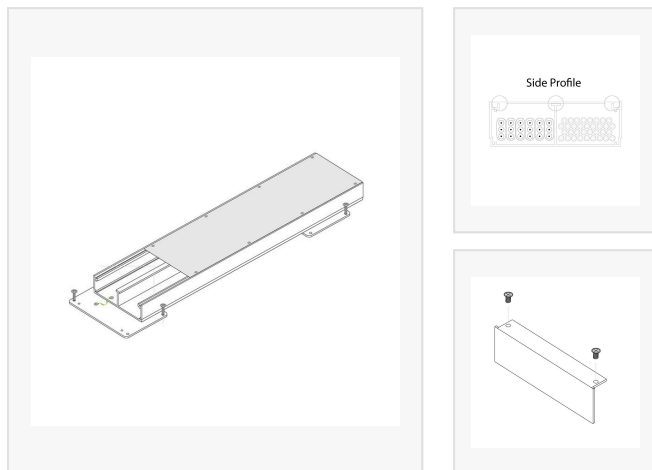

The FD150 is a full-depth flush floor duct at 35mm, designed for in-screed or in-slab installation with only the galvanised steel lid exposed at floor level. With greater cable capacity than the FD120, the FD150 is suited to higher cable volumes in commercial and institutional buildings. Supplied with a base joiner, levelling foot, and joiner plate for easy long-run installation.

TECHNICAL SPECIFICATIONS

Part Number	FD150
Overall Length	3000mm (3m)
Overall Width	150mm
Overall Height	35mm
Body (Aluminium)	3000 × 150 × 35mm, 2 Division
Lid (Galvanised Steel)	1200 × 99 × 3mm per section
Lid Finish	Galvanised Steel
Divisions	2 Channel
Included	Base Joiner, Levelling Foot / Joiner Plate
Available Parts	End Cap (incl. 2 mounting screws), Levelling Bolts

All dimensions are nominal. Custom sizes available on request. Must be installed by a licensed electrician in accordance with AS3000.

KEY FEATURES

- Full 35mm depth — higher cable capacity than FD120
- Galvanised steel lid — durable and flush with floor
- Aluminium body with 2-channel division
- Separates power from data/AV for AS3000 compliance
- Supplied with base joiner and levelling foot/joiner plate
- Levelling bolts for precise height adjustment
- End cap for clean termination
- Concealed under floor finish — clean appearance

TYPICAL APPLICATIONS

✓ In-screed & in-slab installations	✓ High cable volume commercial fit-outs
✓ Corporate offices & boardrooms	✓ Schools, universities & training facilities
✓ Hospitals & healthcare facilities	✓ New builds & major refurbishments