




Trench Duct / In-Floor Duct — Range Overview

TRENCH DUCT · CUSTOM MADE

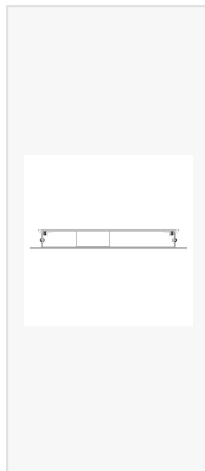

Cableaway's Trench Duct is a cost-effective and durable method of distributing power, data, and audio-visual cables under your selected floor finish. The duct is set into the floor during construction, with only the lid exposed at surface level — keeping the finished space clean, seamless, and hazard-free.

Available in 5mm thick lid section in 2 and 3 channel configurations. Standard sizes are listed below; custom sizes and lid finishes are available to suit any project requirement.

STANDARD SIZES AVAILABLE

Depth × Width	Length	Channels
38mm × 100mm	2.4m	2 or 3 channel
38mm × 150mm	2.4m	2 or 3 channel
50mm × 150mm	2.4m	2 or 3 channel
50mm × 225mm	2.4m	2 or 3 channel
40mm × 300mm	2.4m	2 or 3 channel

AVAILABLE LID FINISHES

Finish	Notes
Galvanised Steel	Standard — cost effective
Aluminium Chequer Plate	Anti-slip surface
Stainless Steel	Hygienic & corrosion resistant
Stainless Steel Chequer	Anti-slip + corrosion resistant
Brass	Decorative finish
Perspex / Acrylic	Visible cable runs
Custom	Available on request

Custom sizes available. Must be installed by a licensed electrician in accordance with AS3000 and A.C.A Requirements. 5mm thick lid section standard.

KEY FEATURES

- In-floor installation — completely concealed under floor finish
- 5mm thick lid section — heavy duty pedestrian rating
- 2 and 3 channel options — segregate power from data/AV
- Multiple lid finishes to suit any floor type
- Custom sizes available for project-specific requirements
- Eliminates trip hazards — floor surface remains flat
- Simplifies future upgrades without structural changes
- Australian wiring rules compliant

TYPICAL APPLICATIONS

✓ Commercial offices & boardrooms	✓ Schools & universities
✓ Retail & shopping centres	✓ Hospitals & healthcare facilities
✓ Train stations & transport hubs	✓ New builds & major refurbishments