
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES

Stainless Steel Flush Deep Floor Box, Double GPO + 3 x Data

FOBSSF1STDO3DXL



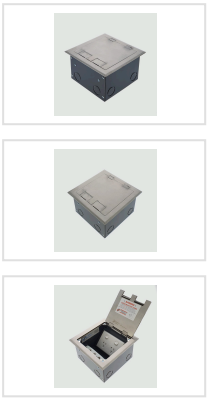

The FOBSSF1STDO3DXL flush lid floor box features a hinged Stainless Steel lid, a Steel box body, and an outlet bracket configured for 1 x Standard Series Power/Data/AV outlet plus 1 x 3-Gang Data outlet. Previously known as FFOB-188S.

TECHNICAL SPECIFICATIONS

Part Number	**FOBSSF1STDO3DXL**
Series	**FOBSSF1STDO3DXL Flush Lid Floor Box**
Lid Material	**Stainless Steel, Hinged**
Body Material	**Steel**
Outlet Configuration	**1 x Standard Series Outlet + 1 x 3-Gang Data**
Conduit Entry	**10 x Combination 25/32mm Knockouts (8 side, 2 base)**
Cord Exit Flaps	**2 x Included**
Weight	**2.7 kg (approx.)**

DIMENSIONS

Block-out in slab: 177×177×112 mm · dimensions nominal

LID SIZE	BOX BODY
180×180 mm	**157×157×102** mm
SLAB BLOCK-OUT	RAISED FLOOR CUT-OUT
177×177×112 mm	**159×159** mm

KEY FEATURES

- Hinged Stainless Steel lid, 180 x 180mm, recessed screw fixing to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 157 x 157 x 102mm nominal depth
- 10 x combination 25mm/32mm conduit knockouts (8 on the outside of the box, 2 on the base)
- Outlet bracket to suit 1 x Standard Series Power/Data/AV outlet plus 1 x 3-Gang Data outlet clip
- Floating floor brackets available upon request

TYPICAL APPLICATIONS

Commercial offices & open plan workspaces	Conference rooms & boardrooms
Retail & showroom fit-outs	Hospitality & hotels

ORDERING INFORMATION

Part Number	**FOBSSF1STDO3DXL**
Series	**FOBSSF1STDO3DXL Flush Lid Floor Boxes (Stainless Steel, 1 x Power + 3 x Data)**
Block-out in Concrete Slab	**177 x 177 x 112mm nominal**
Warranty	**Manufacturer's warranty**