
1300 302 249
sales@cableduct.com.au
www.cableduct.com.au

FLOOR BOXES — STAINLESS STEEL LID FLOOR BOXES


# Stainless Steel Recessed Floor Box, 4 x Double GPO + 12 x Data

**FOBSSR6STDO**



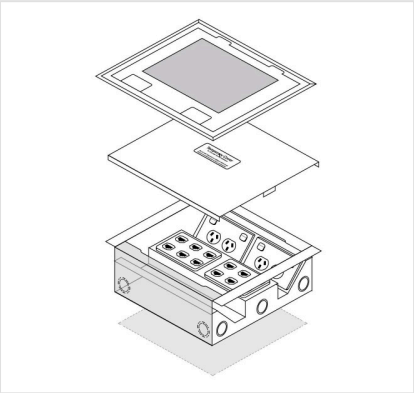





The FOBSSR6STDO recessed lid floor box features a 14mm rebated Stainless Steel hinged lid, a Steel box body, and provisions for 4 x Double GPO Outlets plus 12 x Single Data Outlets. Previously known as FFOB-340.

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Part Number | **FOBSSR6STDO** |
| Series | **FOBSSR6STDO Recessed Lid Floor Box** |
| Lid Material | **Stainless Steel Hinged Lid, Rebated (241 x 340mm)** |
| Body Material | **Steel** |
| Outlet Configuration | **4 x Double GPO Outlets + 12 x Single Data Outlets** |
| Conduit Entry | **10 x Combination 25/32mm Knockouts** |

## DIMENSIONS

Block-out in slab: 342×285×114 mm · dimensions nominal

BOX BODY
**322×265×110** mm

SLAB BLOCK-OUT
**342×285×114** mm

RAISED FLOOR CUT-OUT
**324×267** mm

## KEY FEATURES

- Stainless Steel hinged lid (241 x 340mm, rebated) screw-fixes to the steel box body
- 2 x cord exit flaps allow cords out with the main cover closed
- Temporary cover secures to the body during the concrete pour to prevent ingress of slurry
- Steel box body, 322 x 265 x 110mm nominal depth
- 10 x combination 25/32mm conduit knockouts
- Outlet bracket to suit 6 x Clipsal 2000 Series style Power/Data/AV outlets
- Provisions for 4 x Double GPO Outlets plus 12 x Single Data Outlets

## TYPICAL APPLICATIONS

| | |
|---|---|
| Commercial offices & open plan workspaces | Conference rooms & boardrooms |
| Retail & showroom fit-outs | Hospitality & hotels |
| Educational facilities | Residential installations |

## ORDERING INFORMATION

| | |
|---|---|
| Part Number | **FOBSSR6STDO** |
| Series | **FOBSSR6STDO Recessed Lid Floor Box, Stainless Steel, 4 x Double GPO + 12 x Data** |
| Block-out in Concrete Slab | **342 x 285 x 114mm nominal** |
| Warranty | **Manufacturer's warranty** |