



ELECTRICAL LOCKOUT RANGE

Single Pole Miniature Circuit Breaker Lockout

LOMCB1



LOMCB1

Protect your team, your site and your reputation with Cableaway's Single Pole Miniature Circuit Breaker Lockout. Designed for total electrical safety, it clips securely over a single-pole MCB toggle to keep the breaker isolated during maintenance, preventing unexpected re-energisation that can cause serious injury or damage. Moulded from tough, reinforced nylon, it's built to withstand demanding site conditions while helping keep lockout/tagout (LOTO) procedures compliant with Australian safety standards. It fits in seconds using a standard flat-blade screwdriver, and once in place is locked off with a Cableaway safety padlock — giving total peace of mind that the circuit can't be switched back on until work is complete.

TECHNICAL SPECIFICATIONS

Part Number	LOMCB1
Product Range	Electrical Lockout Range
Device Type	Miniature Circuit Breaker (MCB) Lockout
Suits	Single Pole MCBs
Max. Handle Width	7.7mm
Material	Reinforced Nylon
Colour	Yellow
Installation Tool	Standard Flat-Blade Screwdriver
Padlock Compatibility	Cableaway Safety Padlock

SUITABILITY

Fits single pole miniature circuit breakers (MCBs) up to the handle width below	
POLE CONFIGURATION Single Pole	HANDLE WIDTH < 7.7mm

KEY FEATURES

- Tough reinforced nylon body for demanding sites
- Secures single pole MCBs against re-energisation
- Fits in seconds with a flat-blade screwdriver
- Locks off with any Cableaway safety padlock
- Supports compliant LOTO / WHS procedures
- Bright yellow for clear visual hazard identification
- Part of a full electrical lockout device range
- Cost-effective, reusable across maintenance jobs

TYPICAL APPLICATIONS

Electrical switchboards	Maintenance & shutdown work
Construction sites	Industrial plant & facilities
Commercial building services	Utility & contractor works




ELECTRICAL LOCKOUT RANGE — SPECIFICATIONS & DIMENSIONS

Single Pole Miniature Circuit Breaker Lockout

LOMCB1

FULL TECHNICAL SPECIFICATIONS

Part Number	LOMCB1
Product Range	Electrical Lockout Range
Device Type	Miniature Circuit Breaker (MCB) Lockout
Suits	Single Pole MCBs
Max. Handle Width	7.7mm
Material	Reinforced Nylon
Colour	Yellow
Installation Tool	Standard Flat-Blade Screwdriver
Padlock Compatibility	Cableaway Safety Padlock

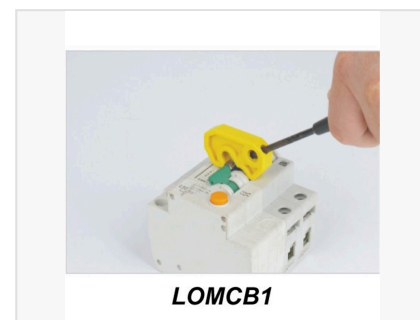

LOMCB1

Lockout fitted to breaker toggle, ready for padlock
(not to scale)

ORDERING INFORMATION

Part Number	LOMCB1
Range	Electrical Lockout Range
Related	LOPADLOCK — Nylon Safety Padlock

INSTALLATION & USE

Fit the lockout over the circuit breaker toggle with the breaker in the OFF position, using a small flat-blade screwdriver to secure it in place. Once fitted, pass the shackle of a Cableaway safety padlock through the lockout body and lock closed — this prevents the toggle from being switched back to ON. Attach a lockout tag noting who applied the lockout and why, per your site's isolation procedure. Only the person who applied the lock should remove it, once work is safely complete.

Compliance & Notes: Cableaway lockout devices are designed to support compliant lockout/tagout (LOTO) procedures under Australian WHS requirements, but the suitability of any lockout for a specific circuit breaker make and model should always be confirmed before use. Always follow your site's isolation procedures and use an appropriately rated safety padlock. Cableaway reserves the right to alter specifications without notice.